
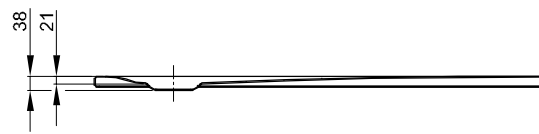

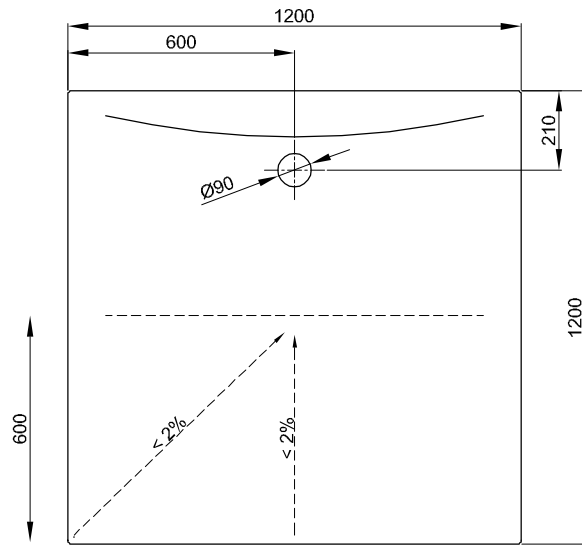


# BetteFlat



## Information

For installation, we recommend the Universal installation system, the Basic installation system, adjustment range 67-205 mm, the minimum support (pre-assembled at the factory) or the BetteLevel mounting feet, adjustment range 85-225 mm. Alternatively, the foot system, adjustment range 80-200 mm.

## Scope of delivery

Standard with Anti-slip Pro surface.

Including noise-reducing pads.

## Certification

Up to 50 % of the shower area can be added to the movement area. Accessibility according to DIN 18040-2 has been certified by DIN CERTCO (registration number P1B100).



## Dimensions

article no.	dimensions in mm
3372 AE	1200 × 1200