

BetteFree



Information




Tapholes can be placed on the overflow rim and on both short side rims.

For professional installation we recommend the use of the original bath feet B23-1500.

Scope of delivery

Including noise-reducing pads.

Design: schmiedem design

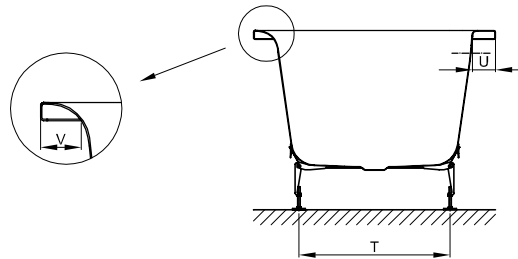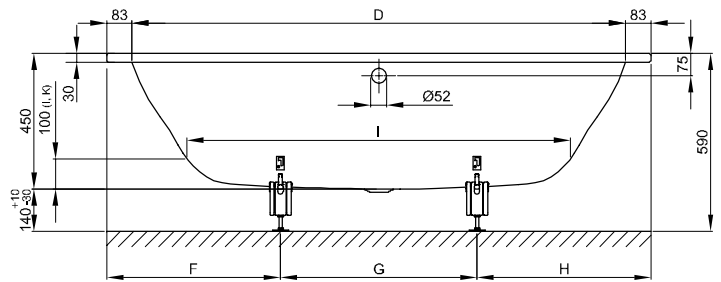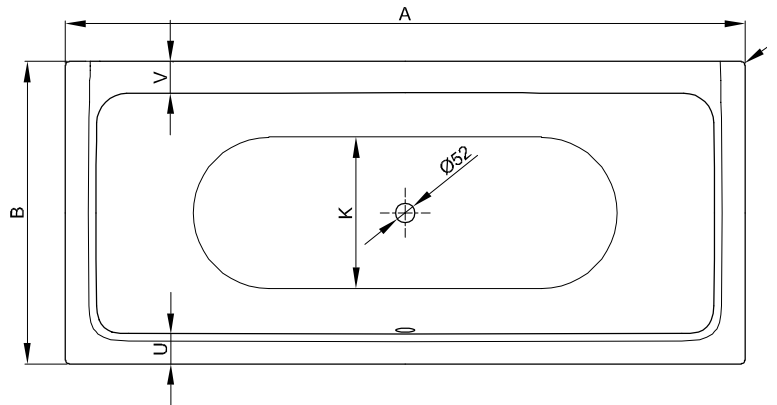

Dimensions

article no.	dimensions in mm	A	B	D	F	G	H	I	K	T	U	V	volume*
6829	1700 x 750 x 450	1700	750	1534	555	590	555	1160	485	430	76	68	150 litre
6830	1800 x 800 x 450	1800	800	1634	580	640	580	1260	535	480	76	67	180 litre
6831	1900 x 900 x 450	1900	900	1734	580	740	580	1360	635	580	76	72	210 litre
6832	2000 x 1000 x 450	2000	1000	1834	625	750	625	1460	735	680	76	73	240 litre

*Water content less 70 litres (for human displacement).