# BetteOne Relax

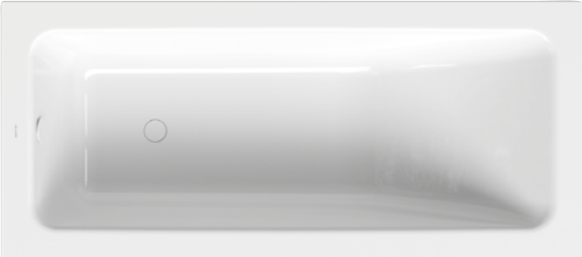

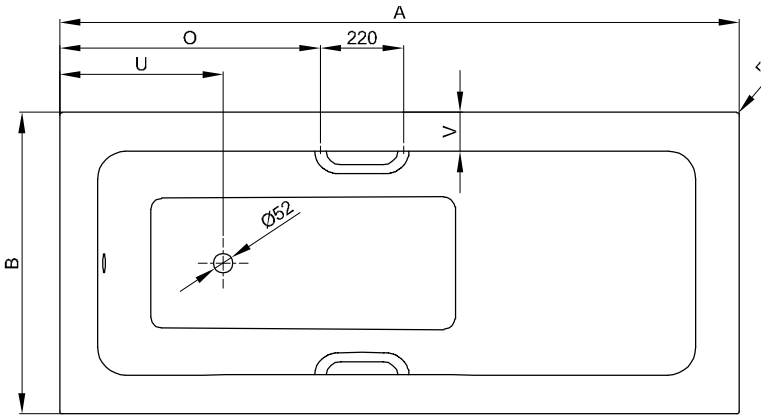


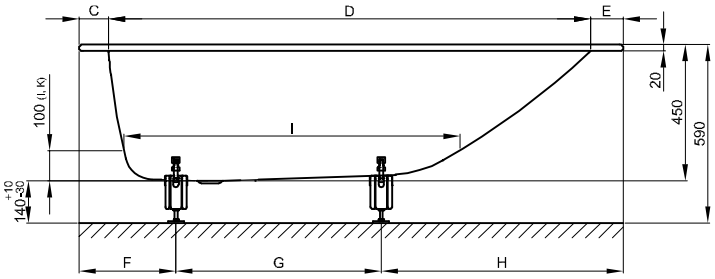


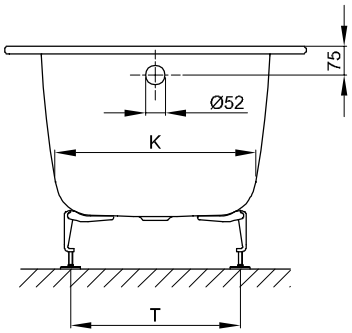


## Information

For professional installation we recommend the use of the original bath feet B23-1500.

For our baths we recommend the enamelled BetteMono waste fittings with push-to-open/close function.

This bath is suitable for undermount installation after on-site inspection and proper installation. We can provide you with the relevant cut-out data on request.

The BetteOne Relax, 1900 × 900 × 450 mm, article no. 3324 and 2000 × 900 × 450 mm, article no. 3325, are not available with BetteUpstands or in special size.

Available with matching washbasin BetteOne.

## Scope of delivery

Including noise-reducing pads.

Design: Tesseraux + Partner

## Dimensions

| article no. | dimensions in mm | A | B | C | D | E | F | G | H | I | K | O | T | U | V | volume* |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3323 | 1800 × 800 × 450 | 1800 | 800 | 95 | 1600 | 105 | 360 | 645 | 795 | 1080 | 515 | 690 | 455 | 433 | 100 | 155 litre |
| 3324 | 1900 × 900 × 450 | 1900 | 900 | 100 | 1690 | 110 | 320 | 780 | 800 | 1165 | 600 | 740 | 545 | 438 | 105 | 210 litre |
| 3325 | 2000 × 900 × 450 | 2000 | 900 | 100 | 1790 | 110 | 320 | 880 | 800 | 1285 | 600 | 790 | 530 | 438 | 105 | 226 litre |

*Water content less 70 litres (for human displacement).

Subject to alteration and production tolerance.