
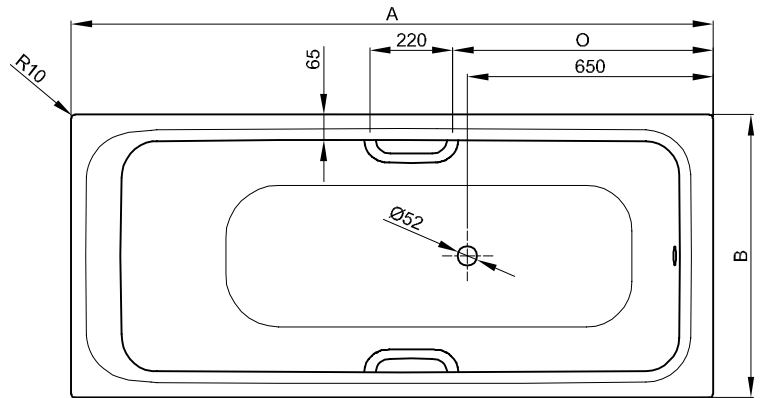


BetteSelect

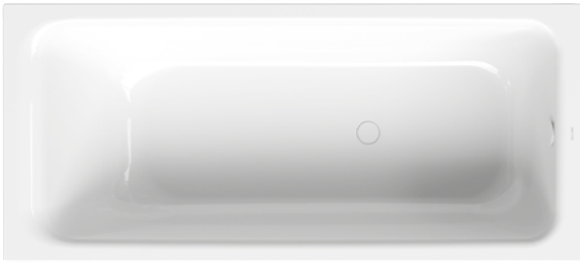

Information



For professional installation we recommend the use of the original bath feet B23-1500.

This bath is suitable for undermount installation after on-site inspection and proper installation. We can provide you with the relevant cut-out data on request.

Scope of delivery

Including noise-reducing pads.

Design: Tesseraux + Partner

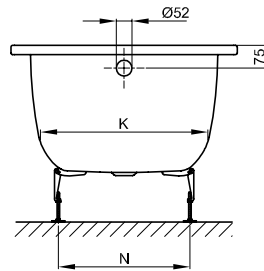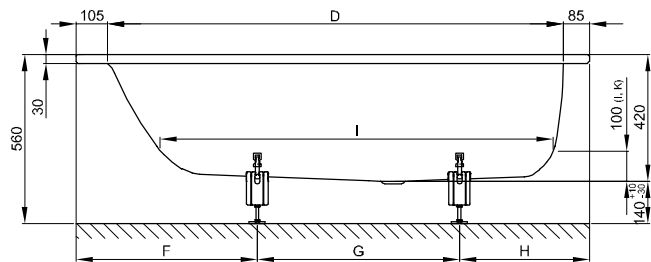

Dimensions

article no.	dimensions in mm	A	B	D	F	G	H	I	K	N	O	volume*
3410	1600 × 700 × 420	1600	700	1410	560	640	400	1200	500	405	590	119 litre
3411	1700 × 700 × 420	1700	700	1510	560	760	380	1300	500	405	690	131 litre
3412	1700 × 750 × 420	1700	750	1510	560	760	380	1300	545	455	690	151 litre
3413	1800 × 800 × 420	1800	800	1610	550	845	405	1400	600	505	790	187 litre

*Water content less 70 litres (for human displacement).